


Operational guide

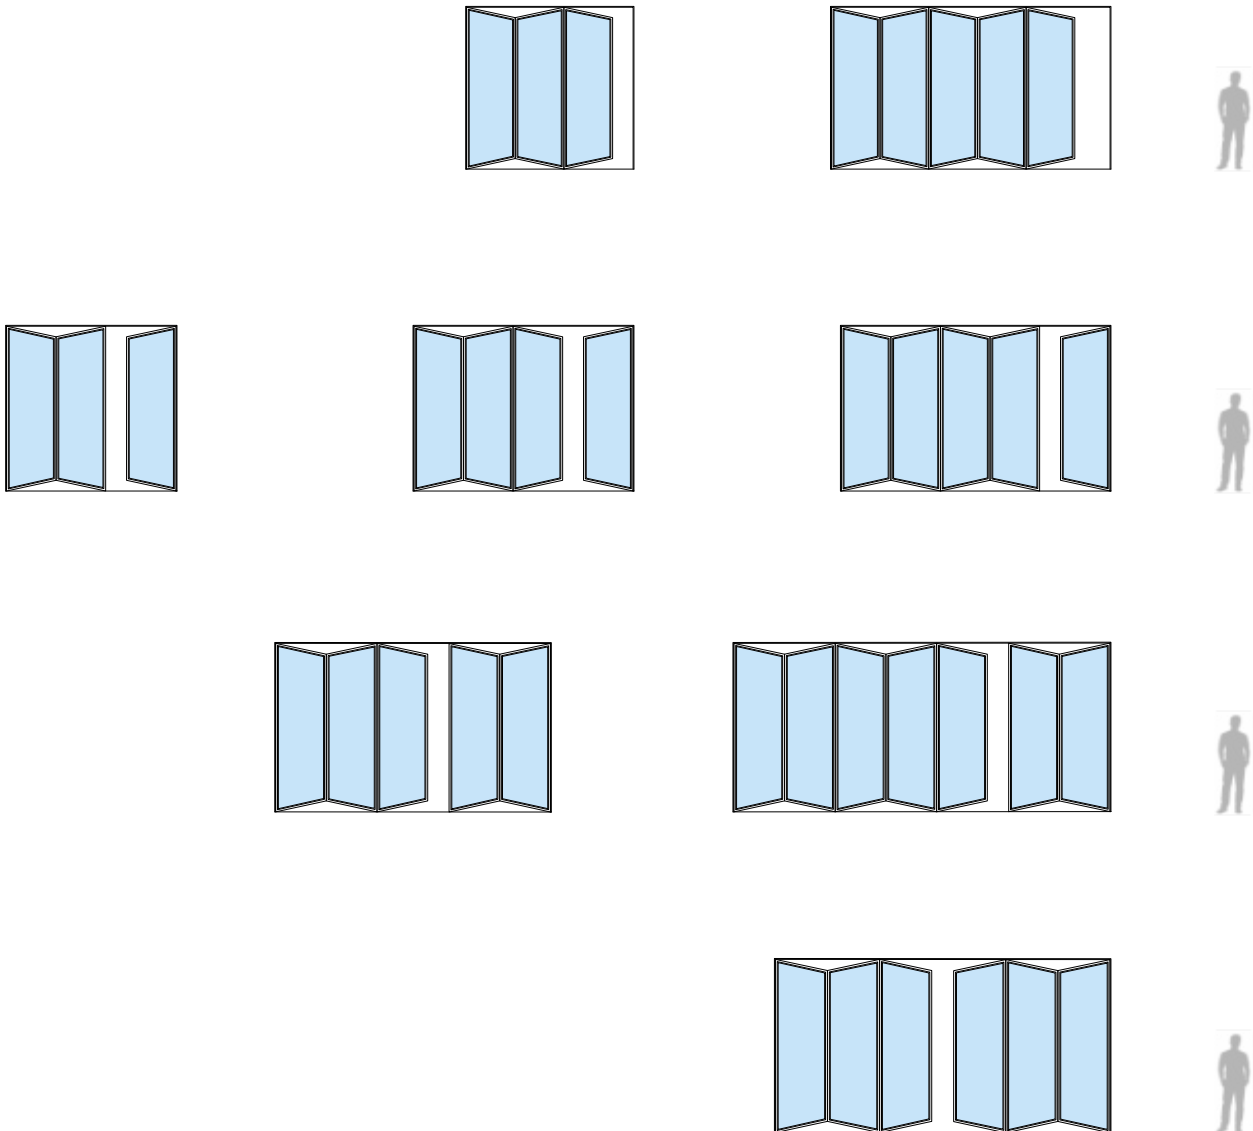

	OS2-65		OS2-75		EBE-65		EBE-85	
	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)
Bifold (sash dim.)	Not available		700 min 1000 max	3050	Not available		Not available	
	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)
Bifold (sash dim.)	Not available		27" min 39" max	120"	Not available		Not available	

The elevations above reflect only the Bifold Outswing configuration, but the same options are also available in the Inward configuration

Dimensional Limits - The dimensions and technical details provided are approximate and may change depending on the specific project requirements and structural constraints