


Operational guide

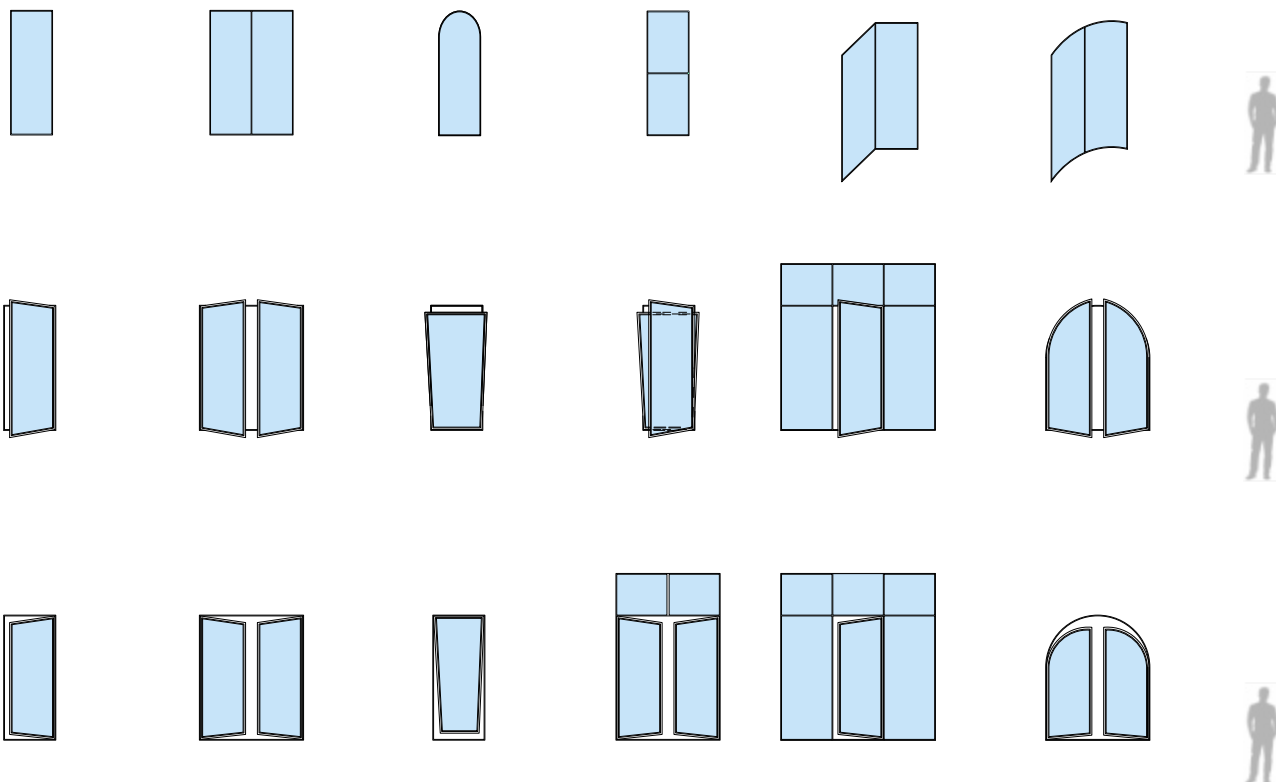

	OS2-65		OS2-75, BV, MB		EBE-65		EBE-85	
	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)
Fixed	_*	_*	_*	_*	_*	_*	_*	_*
Casement Window	1000	2750	1000	3050	1100	3355	1100	3660
French Window	2000	2750	2000	3050	2200	3355	2200	3660
Awning	1500	1100	1500	1100	1000	1800	1000	1800
Hopper	1500	1300	1500	1300	1600	1200	1600	1200
Tilt & Turn (single)	Not available		1200	2700	1200	2800	1200	2800
Tilt & Turn (double)	Not available		2200	2700	2400	2800	2400	2800
	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)
Fixed	_*	_*	_*	_*	_*	_*	_*	_*
Casement Window	40"	108"	40"	120"	44"	132"	44"	144"
French Window	80"	108"	80"	120"	88"	132"	88"	144"
Awning	59"	43"	59"	43"	40"	70"	40"	70"
Hopper	59"	51"	59"	51"	63"	47"	63"	47"
Tilt & Turn (single)	Not available		48"	108"	48"	110"	48"	110"
Tilt & Turn (double)	Not available		94"	108"	94"	110"	94"	110"

Dimensional Limits - The dimensions and technical details provided are approximate and may change depending on the specific project requirements and structural constraints

*Fixed units offer sizing flexibility. Dimensions depend on glass performance, structural load, and, where required, certified limits. Please contact us for tailored solutions.